



### Features:

- 98 dB Sensitivity 1 W / 1 m
- 1000 W Power Handling
- 4" Copper Sandwich Voice Coil for low Power Compression
- Double treated Cone for Water Protection
- Neodymium Magnet System
- Triple Aluminum demodulating Rings for ultra low Distortion
- Optimal for compact 2- or 3-way Systems

## SPECIFICATIONS


APPLICATION		
Nominal Impedance:	Ohm	8
Power handling AES noise:	W	1000
Sensitivity (1 W / 1 m):	dB	98
Frequency response:	Hz	45 - 1700
Voice Coil Diameter:	mm	101.6 (4")
Voice Coil Material:		Cu
Voice Coil Winding Depth:	mm	19
Magnet Gap Depth:	mm	10
Basket:		Cast Aluminum
Effect. diaphragm diameter D	mm	260

THIELE-SMALL PARAMETERS			
Resonance Frequency:	Fs	Hz	43
DC Resistance:	Re	Ohm	5.70
Mechanical Q Factor:	Qms		5.2
Electrical Q Factor:	Qes		0.25
Total Quality Factor:	Qts		0.24
Equivalent Volume:	Vas	L	65
Moving Mass:	Mms	kg	0.080
Mechanical Compliance:	Cms	mm / N	0.170
BL Factor:	BL	Tesla m	22.25
Effective Piston Area:	Sd	m <sup>2</sup>	0.0531
Max. linear Excursion:	Xmax	mm	+/- 4.5
Voice Coil Inductance:	Le1k	mH	0.85
	Le10k	mH	0.54

MOUNTING INFORMATION		
Overall Diameter:	mm	318
Mounting Holes Diameter:	mm	8 x (7 x 8)
Bolt Circle Diameter:	mm	300
Baffle cut-out Diameter:	mm	284
Overall depth:	mm	146
Net Weight:	kg	4.7

### Recommended reflex enclosure:

15 L / 70 Hz, -3 dB = 82 Hz, BRD = 80 mm / 138 mm long  
 25 L / 60 Hz, -3 dB = 67 Hz, BRD = 100 mm / 177 mm long

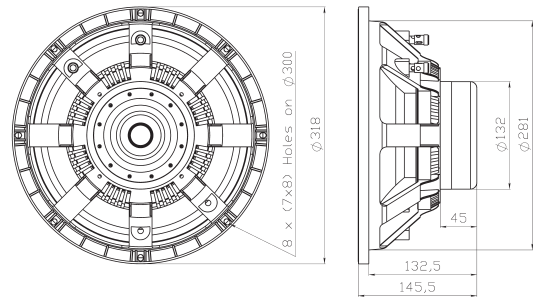

Frequency response measured 100W (28.3V) at 1 m in a closed enclosure of 50 litre in an anechoic chamber incl. 2nd and 3rd harmonic distortion raised 20 dB.

